


- Unique service filter alarm
- Eliminates the build-up of sludge and water in the tank
- Reduces cost of filter maintenance
- Features genuine Racor® Aqua Block® element
- Optional magnetic fuel conditioner
- Available with Mechanical or Digital Timer
- Marine version with U.S. Coast Guard-accepted metal heat deflector.

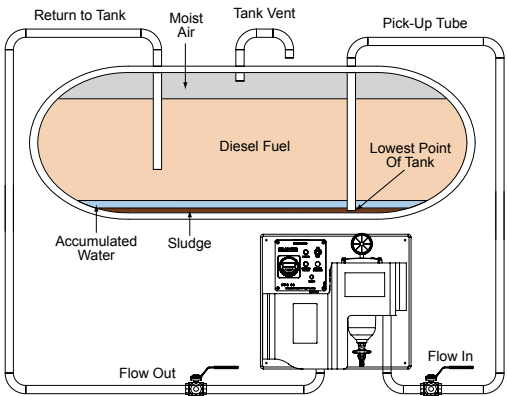


Technical Specification	
Inlet	1/2" #8 JIC Male
Outlet	1/2" #8 JIC Male
Volt	12V or 24V DC
Circuit Breaker	10A@12V, 5A@24V
Flow Rate	150 GPH (567.8 LPH)
Self-priming	5 ft (1.5 m) (System Primed)
Max Lift	10 ft (3.05 m)
Pump Body	Brass
Gears	Bronze
Shaft	Stainless Steel
Seal	Fluoroelastomer lip seal
Motor	DC Permanent Magnet

Industrial Part Number	Description	
Digital Timer	Mech. Timer	
FPS150R39	FPS150R17	12V Racor® w/ fuel conditioner
FPS150R40	FPS150R18	24V Racor® w/ fuel conditioner
FPS150R41	FPS150R19	12V Racor® System
FPS150R42	FPS150R20	24V Racor® System

Marine Part Number	Description	
Digital Timer	Mech. Timer	
FPS150R23	FPS150R01	12V Racor® w/ fuel conditioner w/ metal heat deflector
FPS150R24	FPS150R02	24V Racor® w/ fuel conditioner w/ metal heat deflector
FPS150R25	FPS150R03	12V Racor® System w/ metal heat deflector
FPS150R26	FPS150R04	24V Racor® System w/ metal heat deflector

Model	A	B	C	Weight
FPS-150R	18.00" (457.2mm)	25.59" (650mm)	7.50" (190.5mm)	38 lbs (17.24 kg)

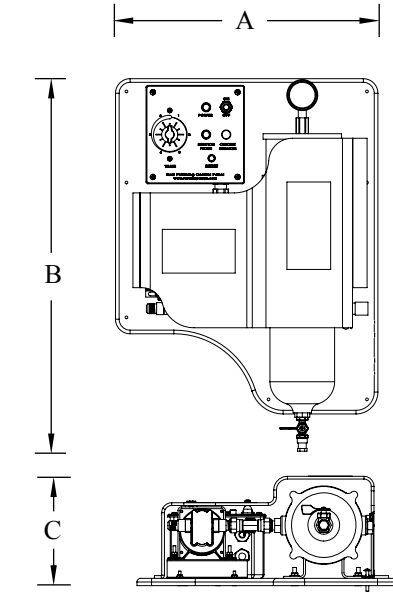

Drawing dimensions for reference only. Technical drawings available upon request. Shown: FPS150R41